

FS70GDHC

REFRIGERATED EQUIPMENT

Project Name:

Location:

Item #

Model #:

AIA #

SIS #

Qty:

MANUFACTURERS

105 Steamboat Drive • Warminster, PA 18974 • (215) 675-9220 • (800) 673-7868

Email: sales@powersequipmemt.com

Website: powersequipment.com

Model:

SLIDING DOOR FLORAL COOLER Sliding Door Refrigerator



STANDARD FEATURES

Self contained - ready to plug in.

- R290 hydrocarbon refrigerant is used to comply with all environmental standards. R290 has zero ozone depletion potential (ODP) and three global warming potential (GWP).
- ▶ Powder-coat exterior finish.
- ▶ Digital temperature control.
- ➢Black PVC double pane glass self closing doors with Low E and argon.
- ➢Hot gas condensate evaporator.
- Switch controlled vertical LED lamps.
- EC fan motors operate at higher peak effciences and move a more consistant volume of air which produces less heat and reduces energy consumption.
- ≻Adjustable coated wire shelving.
- ➢Balanced refrigeration systems with a temperature range of 35° F to 41° F
- ≻Louvered motor covers.
- Stainless steel bottom floor.
- ➤The entire cabinet is foamed in place using a high density, CFC free polyurethane insulation.

(I)	Ð
Intertek	Intertek

		Cabinet Dimensions		Door Size				Plug					
Model	Doors	W	D	Н	W	Н	Shelves	ΗP	Туре	Voltage	Amps	Lights	Crated Weight
FS70GDHC	2	70"	31"	74½"	32"	55"	3	1/2	5-15P	115/60/1	10	2	667 lbs

Sliding Door Floral Cooler

FS70GDHC

Sliding Door Refrigerator





WARRANTY

One Year Parts and Labor

- The warranty is in effect for one year from date of installation.
- Factory service authorization must be obtained before any work may be performed under the labor warranty.
- The warranty covers reasonable labor costs, based on staight time, when the unit has been diagnosed as defective.
- This warranty does not cover original installation, initial start-up, normal adjustments, or maintenance.
- OEM parts needed for warranty must be obtained from Powers Equipment.


Five Year Compressor Warranty

Powers warrants to the orignal purchaser for a period of five years from the date of installation, that we will replace the compressor on the unit if found, in the resonable opinion of the factory, to be defective in material or workmanship. Relays, overloads, capacitors, and any other electrical components are not included in the five-year warranty.


ELECTRICAL REQUIREMENTS

Cooler is pre-wired at factory and ready for connection to a 115/60/1 phase, 15 amp dedicated outlet.



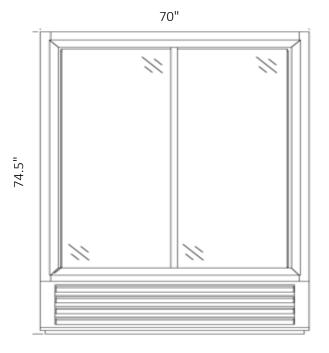

FRONT VIEW



SIDE VIEW